



# Toshiba Satellite M305D-S4829 Keyboard Replacement

Written By: Dozuki System



---

## INTRODUCTION

---



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Toshiba Satellite M305D-S4829 Keyboard Replacement



- Unlatch the battery by pushing outward on both latches.

## Step 2



- Slide battery out.



### Step 3



- Remove the five "F2" screws with a Phillips #0 screwdriver.

### Step 4





- Insert the plastic opening tool above the F1 key.
- Apply upward pressure until the black plastic strip snaps off. The entire strip will easily come off from left to right.

## Step 5



- Find the screws above the F1 and INS keys.
- Unscrew both screws with a Phillips #0 screwdriver.

## Step 6

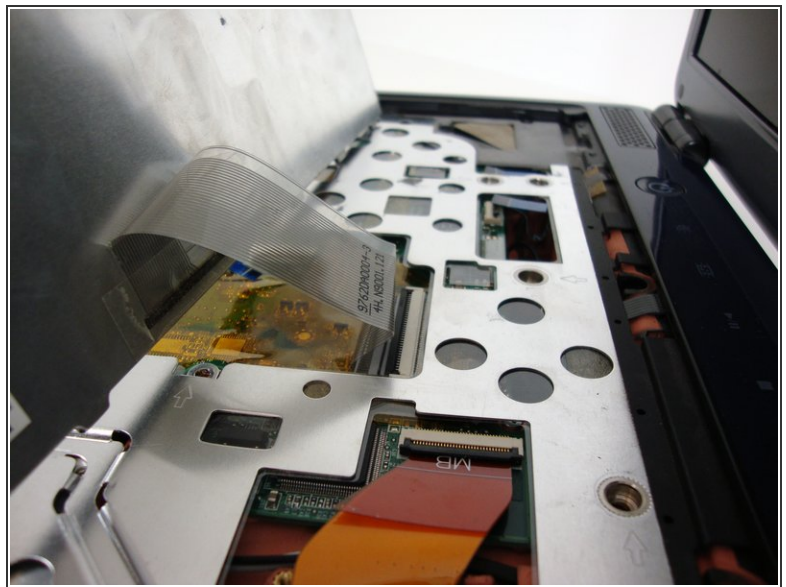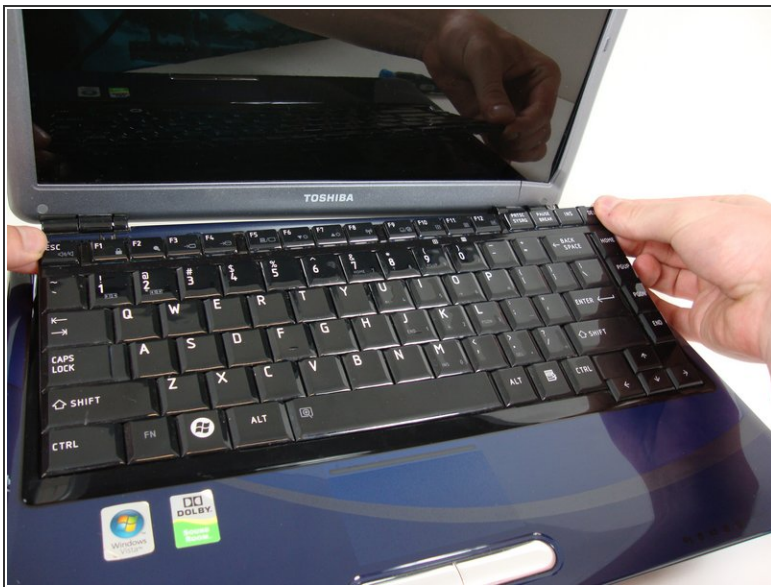

- Slowly lift the top edge of the keyboard out with your fingers.
- The ribbon cable located on the back of the keyboard will become accessible.



## Step 7



- Locate the black ribbon cable flap.
- Detach flap with plastic opening tool. The ribbon cable will become free.

## Step 8



- Your keyboard has now been successfully removed.

To reassemble your device, follow these instructions in reverse order.