



Stick Blender

Written By: Tobias Isakeit



INTRODUCTION



Dismantling and Recycling Centre (DRZ)

Katharina Lenz, Vienna / Austria

Health & Safety

Dismantling doesn't include any harmful steps. Nonetheless workers should wear personal protection equipment like gloves, goggles, apron and robust shoes.

Note: This is a general guide for most stick blenders. As the construction can differ, the dismantling steps mentioned below can vary in their order. However, the described steps show what parts the removal should focus on.

TOOLS:

- [Several screwdrivers \(T1\)](#) (1)
 - [Flathead Screwdriver \(T2\)](#) (1)
 - [Hammer \(T3\)](#) (1)
 - [Side cutter \(T4\)](#) (1)
 - [Pliers \(T5\)](#) (1)
 - [Cutter \(T7\)](#) (1)
 - [Power Screw Driver \(T8\)](#) (1)
 - [Industrial scale \(T9\)](#) (1)
-

Step 1 — Stick Blender




- Cut the power cable.
- Unscrew the case.

Step 2



- In case the screws are not accessible, use a hammer to crush open the case head.
- And/or use a hammer to pry open the case along the seam.

Step 3

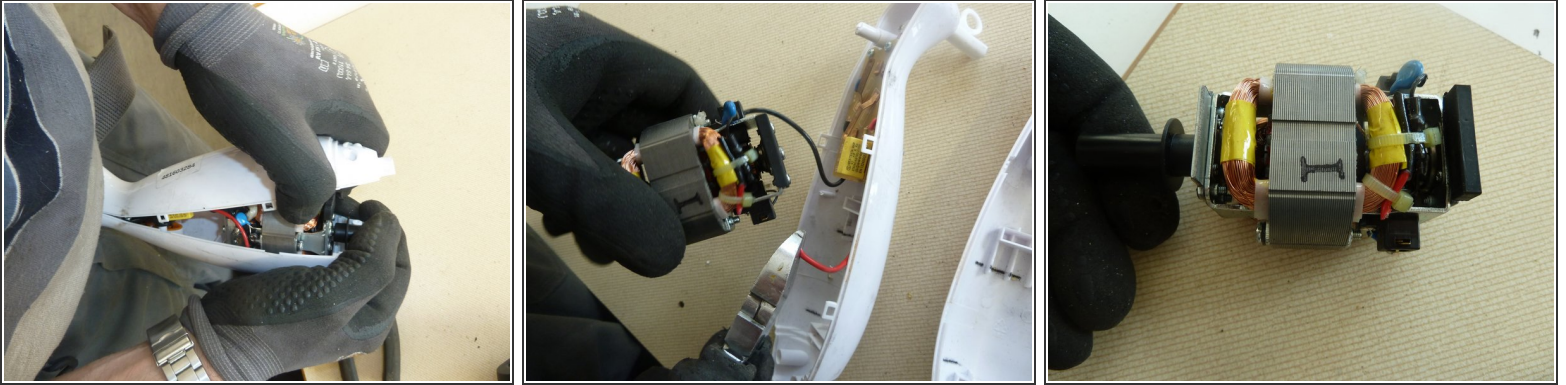

- Open the case.
- Remove the motor by cutting all wires.

Step 4



- Unscrew the printed wiring board (PWB).

Step 5



- Separate the remaining materials according to their type and go on with the appropriate data sheet (e.g. aluminium, ferrous metals, plastic, further PWBs, etc.).
- Make sure the plastic parts are completely free of metal pieces.