




How to Strip Other Cables

Written By: nst

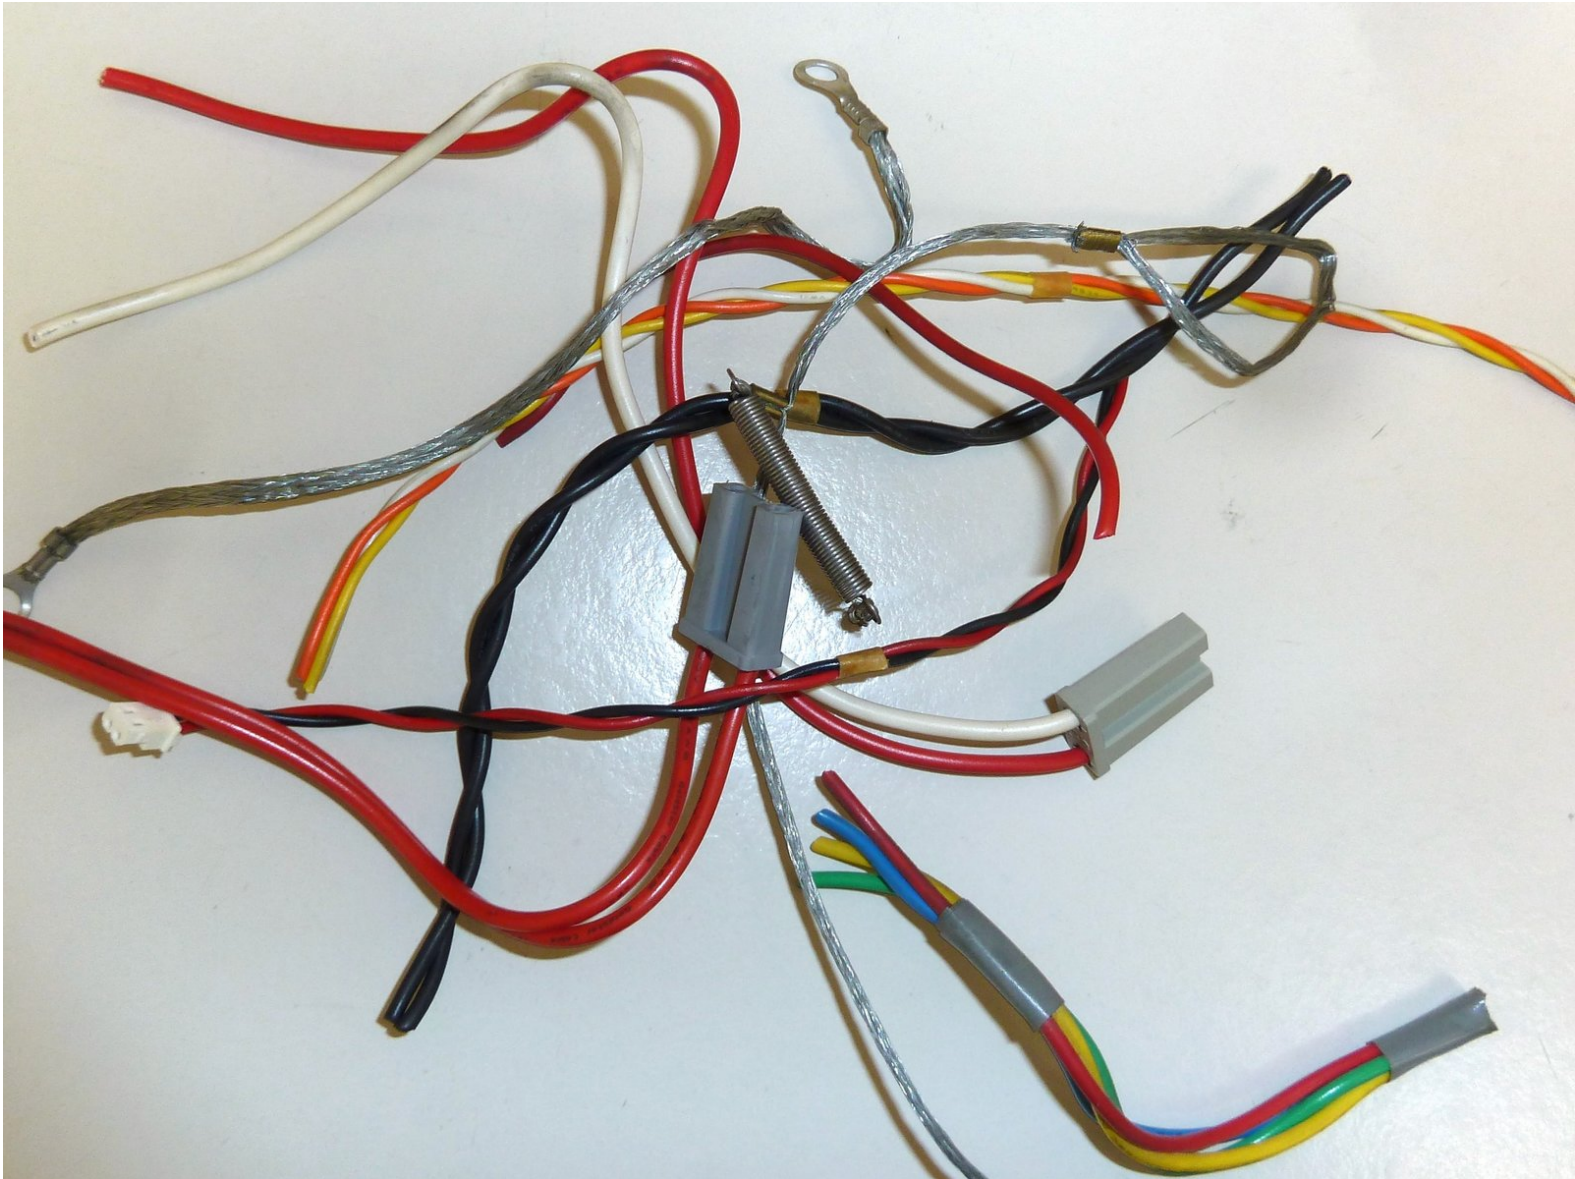

INTRODUCTION

Health and Safety

Burning cables to remove metals is very hazardous and must be avoided. Personal protection equipment like goggles and gloves should be worn as splints can snap around while using a side cutter.

TOOLS:

- [Side cutter \(T4\)](#) (1)
 - [Pliers \(T5\)](#) (1)
 - [Industrial Scissors \(T6\)](#) (1)
-

Step 1 — How to Strip Other Cables



- Clean the cables by removing all foreign materials and plugs.
- ⚠ Because cables will be mechanically granulated, all brackets or similar components must be removed to prevent the damage of the granulators.
- ⚠ Some plugs can be reused (mainly the bigger flat ones). Clarify this with the local cable recycler/granulator.

Step 2



- Place the cleaned wires aside for further processing at a cable granulator.